



# Velocity NoteMagix M10 A82 Hard Drive Replacement

There are two screws holding in a plate that covers the hard drive. Removing the screws and the plate will yield access to the hard drive.

Written By: Sam Middleton

## INTRODUCTION

This guide will show how to safely remove the hard drive from the NoteMagix M10 A82 netbook.

### TOOLS:

- [Phillips #1 Screwdriver](#) (1)

## Step 1 — Battery




- Place the notebook on the table, with the battery facing away from you.
- Slide the switch from "lock" to "unlock" with your right hand on the right side of the computer.
- Maintain holding the right switch in the "unlock" position.
- Use your left hand to slide the left switch from "lock" to "unlock".

## Step 2



- Maintain both left and right switches in the "unlock" position.
- Use your forefingers to push the battery out of the computer.

### Step 3 — Hard Drive

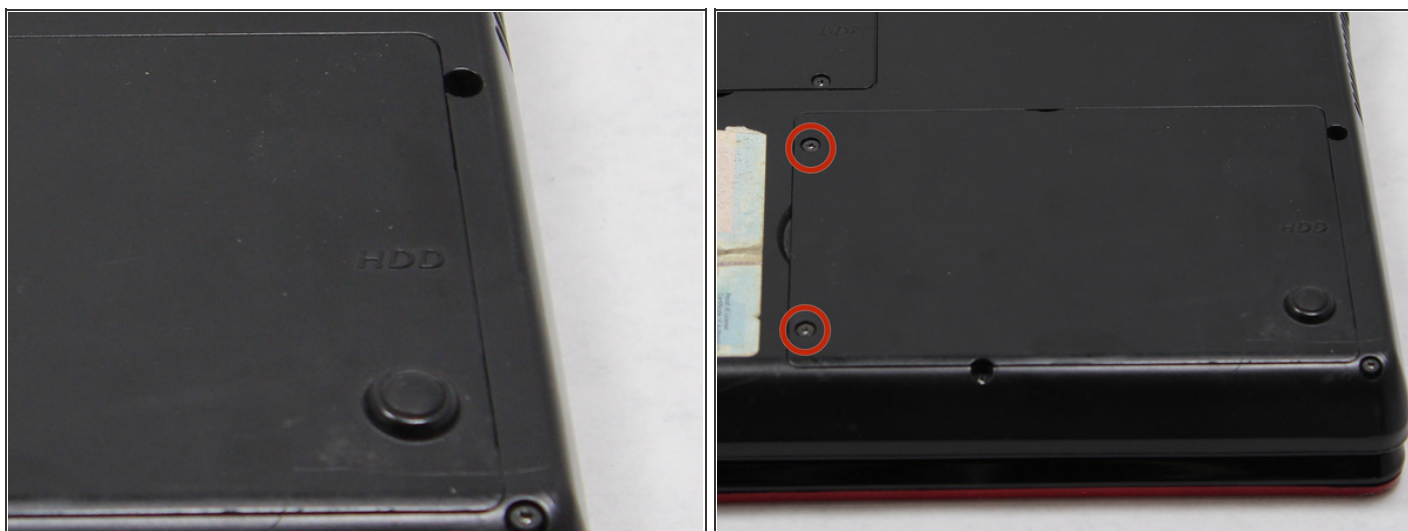

- Unscrew the two 3.65mm Phillips #1 screws on the plate marked "HDD".

### Step 4



- Lift the HDD plate off of the back to reveal the hard drive.

## Step 5



- Use the spudger to push the area above the connector on the hard drive to the right.
- Lift the hard drive gently from the computer with the spudger.

<p>To reassemble your device, follow these instructions in reverse order.</p>

This document was last generated on 2014-11-21 12:37:28 AM.